Dual Projector Stacking System

The MOVING iMAGE TECHNOLOGIES Dual Projector Stacking System provides a robust support frame to add a second projector above our Series 3 low-profile pedestal. It includes an exhaust adapter duct for the lower projector to facilitate HVAC hookup. The stacker frame is fabricated from rugged 10 GA steel and designed to support projectors up to 400 lb. The Dual Projector Stacking System allows on center targeting for ease of convergence in your Premium Large Format auditorium. The system can accommodate various optional components such as the XL-Mover (2), IMC automation, IS-30 Spike Arrestor, IS-20 Power Managers, or other products, all of which can be pre wired in our factory to your custom specifications. (See separate specifications for the S3 Low Profile Pedestal).




Features:

- Supports small and large DLP projectors from all major OEMs
- 16 RU of space available from 2 sides for flexible configuration to accomodate crucial equipment.
- Internal work light built-in to ease service
- Long leveling feet allow tilting to 10 degrees

- Tilt blocks available for greater tilt
- Hold-down clamps capture projector feet
- For use in new construction or retrofits
- Conduit knockouts on the front side for routing power in and out
- May be track mounted

Block Diagram:



Options:

- Power Distribution Unit
- International Voltages Available
- IMC Series Automation Systems
- IS-30 Spike/Surge Protection Unit
- M-Series Dimmer

Part Numbers:


- A000310-001 Standard Pedestal
- A000282-00x IMC-3j Automation system, 2RU tray
- C003184-001 Tilt Riser Block
- C003199-001 Adapter, NEC projector mount (2 req'd)
- PA00001-00x Dimmer (2 channel and 4 channel versions)

Mechanical:

• Weight:

- Dimensions:
 - 53.0 x 35.5 x 50" high

* Due to on-going development, features and specifications subject to change without notice.

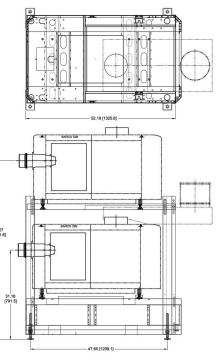

- Pre Assembly and Wiring
- Pre-Configuration and Addressing of Network
- Seismic Foot Clamps

• A000176-00x Power Distribution unit (N. America and International versions) • A000290-00x IS-30 Spike and surge arrestor (120/220V and 230/380V versions)

80lbs (280lbs mounted to S3 Low Profile Base)



SALES@MOVINGIMAGETECH.COM | 1-866-MIT-8501 | MOVINGIMAGETECH.COM