

More and more theater owners are considering boothless construction options to save construction and operating costs. The ImageLift Model S is the newest addition to Moving iMage Technologies' line of lift products. Like its ImageLift big brother, the Model S raises the projector for unobstructed projection on the screen, and safely lowers it to a convenient height for servicing, avoiding the use of ladders by service personnel. The Model S uses well-documented Unistrut channel for the track. It is designed for use with projectors of approximately 150 pounds or less, and utilizes the MiT MicroPod quiet projector enclosures (sold separately). When the projector pod reaches the upper extent of travel the carriage is pin-registered to the upper plate to ensure rock-steady projection, and the ventilation supply and return ports mate with their receptacles with gaskets. Cable carriers keep the AC and signal cables controlled during travel.

The ImageLift Model S is available in two configurations, a version with the lifting winch mounted to a baseplate on the floor, and another version with the winch mounted high for applications where loss of seats cannot be tolerated.

## Features:


- Attractive, contemporary appearance
- All parts black texture powder coated
- Interface plate allows HVAC hard connection
- Cable carriers for AC and signals included
- Safety braking unit included as standard
- Features specific to version with baseplate and low-mounted winch:
- Low center of mass
- Requires minimal wall support, compatible with standard construction methods
- The projector pod lowers onto the top of the winch enclosure for stable support during projector servicing
- Features specific to version with high-mounted winch:
- Avoids loss of any seats (additional wall reinforcement may be required)

## Mechanical:

Weight: TBD

Overall Height: A000415-011 11 feet, 0 in.

A000415-012 12 feet, 6 in. A000415-014 14 feet, 0 in.

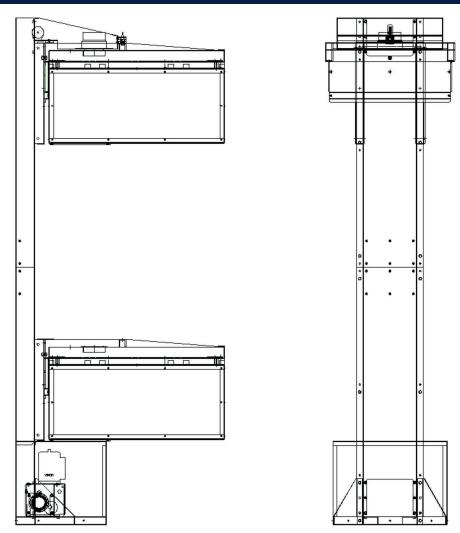

A000415 Baseplate mounted version shown

## **Part Numbers:**

Part numbers:	
A000415-011	11-foot, baseplate version
A000415-012	12.5-foot, baseplate version
A000415-014	14-foot, baseplate version
A000416-011	11-foot, High winch version
A000416-012	12.5-foot, High winch version
A000416-014	14-foot, High winch version

Sold separately:

A000402-001 Micropod enclosure (47L x 34W x 24H)

A000411-011/-012/-014 Load brackets, for mounting to central column C001710-004/-006 Riser block, increases overall height by 4" or 6"



<sup>\*</sup> Due to ongoing development, features and specifications subject to change without notice.